
(19) World Intellectual Property Organization

International Bureau

15 December 2005 (15.12.2005)







(10) International Publication Number WO 2005/119150 A2

(51) International Patent Classification7:

F25J 5/00

(21) International Application Number:

PCT/US2005/009808

(22) International Filing Date: 23 March 2005 (23.03.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 60/556,535

26 March 2004 (26.03.2004)

(71) Applicant (for all designated States except US): FLUOR TECHNOLOGIES CORPORATION [US/US]; One Enterprise Drive, Aliso Viejo, CA 92656 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PRESCOTT, Clifford, Neal [US/US] (US). ZHANG, Jianfeng [US/US]

(74) Agent: FESSENMAIER, Martin; Rutan & Tucker, LLP, Suite 1400, 611 Anton Blvd., Costa Mesa, CA 92626 (US). (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CRYOGENIC PIPELINE CONFIGURATIONS AND METHODS

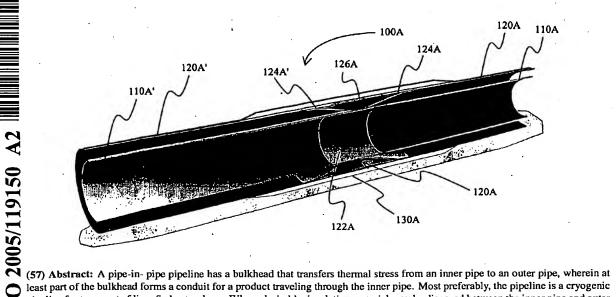

least part of the bulkhead forms a conduit for a product traveling through the inner pipe. Most preferably, the pipeline is a cryogenic pipeline for transport of liquefied natural gas. Where desirable, insulating material may be disposed between the inner pipe and outer pipe, while spacers may maintain the distance between the pipes.